



CAR FILLING



FUEL MANAGEMENT SYSTEMS



KITS



PUMPS



METERS



METERED NOZZLES

# DELPHIN PRO\_X

## FEATURES

- FULLY AUTOMATIC
- 100% COMPATIBLE WITH ALL CARS AND VEHICLES\*\*
- AUTOMATIC FLOW RATE REGULATION
- PRESET QUANTITY

DELPHIN PRO\_X is the latest innovation within the PIUSI AdBlue® car filling equipment: preset function, automatic FLOW RATE regulation and visual diagnostic alert are just few of its main new features. This dispenser comes both in AC and DC version, and, thanks to the sturdy and adjustable cart, it can easily support 60/200 ltrs drums.

The AUTOMATIC FLOW RATE function adjust the FLOW RATE according to the vehicle's tank. While the PRESET allow to pre-define the total amount of AdBlue® to be filled in the car tank.

## PERFORMANCE

**2-15 L/MIN**

FLOW RATE

**AC/DC**  
VOLTAGE

POWER

**2M**

HOSE LENGTH



**DELPHIN PRO\_X**



## PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
FO0100400	43,5	96	770X1080X800	30,3X42,1X31,5	4	1
FO0100410	51	112,5	770X1080X800	30,3X42,1X31,5	4	1



NOZZLES



FILTRATION



TANK MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



WATER



WINDSCREEN

## FUNCTIONING



### AUTOMATIC FLOW RATE

The fastest automatic way to refill any car. Thanks to this option, DELPHIN PRO\_X automatically adjust the flow rate accordingly to the vehicle's tank.



### PRESET

By pre-setting the needed quantity the operator can concentrate on something else while DELPHIN PRO\_X is refilling. DELPHIN PRO\_X will stop automatically when the preset quantity will be reached.

## IN THE BOX

- DELPHIN PRO\_X UNIT
- AF2 CONNECTOR
- INSTRUCTION MANUAL

## DETAILS




UNIVERSAL ISO CONNECTOR



AF2 CONNECTOR

## DIMENSIONS

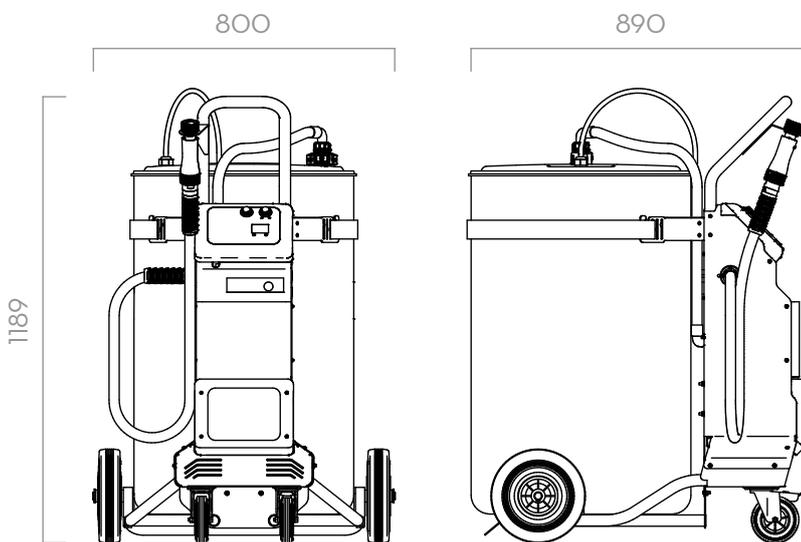

Dimensions expressed in millimeters

## MATERIALS

- PUMP:
- BODY: POLIPROPYLENE
- DIAPHRAGM: POLIPROPYLENE

## TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		VOLTAGE			HOSE		ON/OFF
			L/MIN	GPM	AC V./HZ DC VOLT	POWER WATT	AMP. MAX.	LENGHT	Ø	SWITCH
FO0100400	DELPHIN PRO_X AC		2 - 15	0,5 - 4	230/50	260	2,2	2 M	3/4"	YES
FO0100410	DELPHIN PRO_X DC		2 - 15	0,5 - 4	230/50**	260*	2,2**	2 M	3/4"	YES

\* BATTERY CHARGER  
\*\*IN ACCORDANCE TO ISO/FDIS 22241-4:2009

# DELPHIN PRO\_X

FILLING SYSTEMS